



JR GEO-DOME (PERM) W/BRACKETS


301-134BP

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	303-226	Braces (Almond)	20
2	303-227	Braces (Grey)	15
3	303-228	Braces (Lt. Blue)	30
4	503-647	Dome Anchors	5
5	913-370	Bottom Bracket (Notched)	10
6	913-371	5 Hole Bracket (Notched)	6
7	913-372	6 Hole Bracket (Notched)	10
8	913-370B	Bottom Attach Bracket Back	10
9	913-371B	5 Hole Atttach Bracket Back	6
10	913-372B	6 Hole Attach Bracket Back	10
11	116-540	5/16" x 2" Button Head Bolt	130
12	316-501	5/16" Flat Washer	260
13	226-502	5/16" Nylon Lock Nut	130
14	905-847	Bolt Cap	130
15	416-350	Socket Key	1
16	805-532	Warning Label	1
17	805-534	SportsPlay Label	1
18	-----	Maintenance Checklist	1


IMPORTANT

Please retain this instruction sheet in your files. It contains important replacement parts information. All equipment should be installed in accordance with these instructions.

It is important to and maintain all public playground equipment properly. Playground equipment that is improperly maintained can cause serious injury. Periodical inspections, maintenance, repair and/or replacement of damaged parts is necessary for safe operation of equipment and safety of users. Resilient Surfacing should be used under all playground equipment. Appropriate publications, available at no charge, from the consumer product safety commission, include "A HANDBOOK FOR PUBLIC PLAYGROUND SAFETY." You can receive your free copy by calling 1-301-504-7908.

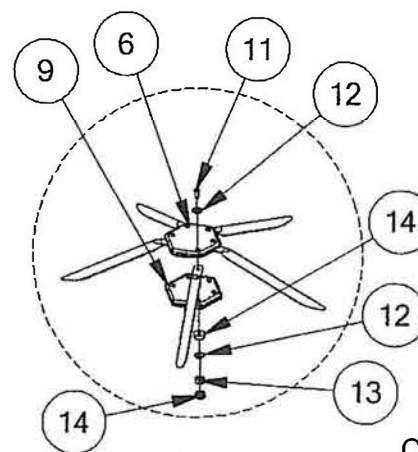


BOLTING
DETAIL

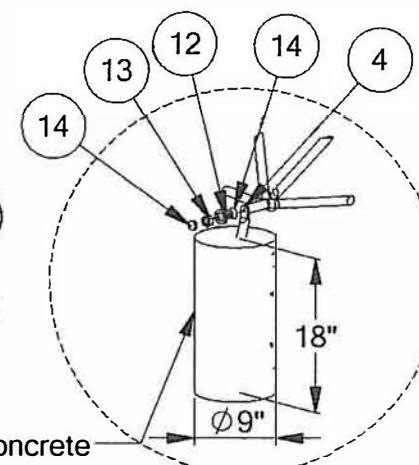

Concrete

PERMANENT
INSTALLATION

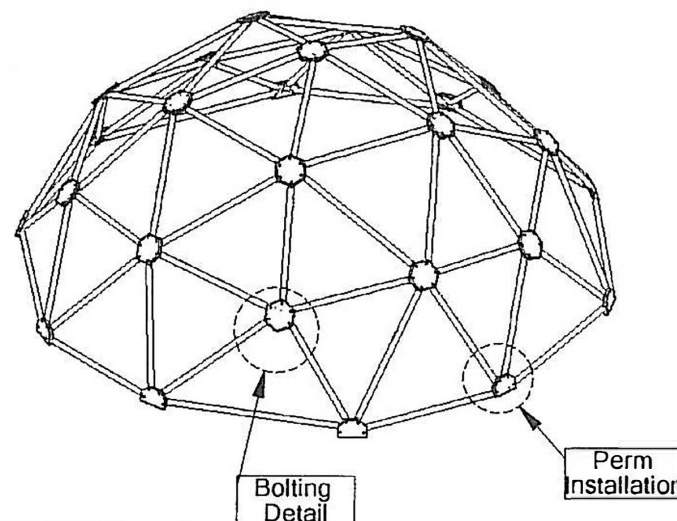

Dome Footprint is 8' wide
Dome Use/Fall Zone is 20'
diameter circle

Sheet 1 of 3



GEO-DOME (PERM) W/BRACKETS

301-134BP

GENERAL ASSEMBLY INSTRUCTIONS:

Check all the parts and hardware with the packing list to be sure you have received everything needed to assemble this product.

Check each part carefully and remove any sharp edges or projections that may have been caused in shipping.

CONTACT YOUR LOCAL DISTRIBUTOR WITH NOTIFICATION OF ANY MISSING OR DAMAGED PARTS.

Contact must be made within ten days of receipt of your order.

SPECIFIC ASSEMBLY INSTRUCTIONS:

Note: Notched Brackets are on the outside of the dome, braces underneath them followed, by the Back Bracket with nuts inside of the dome, covered with bolt covers/caps. Do not tighten fasteners until the entire unit is assembled.

STEP #1: Start with 303-227 Grey Braces, and the bottom brackets. Assemble bottom row. At the footing marked with a circle (see sketch pg 3), use 116-540 2" button head bolts inserted from the outside with one 316-501 Flat Washer. After passing the bolt through the bracket and brace install bolt cover, followed by flat washer and lock nut on the inside. The anchors will be added later. DO NOT INSTALL ANY BOLT CAPS AT THIS TIME.

STEP #2: Next assemble all the joints with five 303-228 Lt. Blue Braces, use 116-540 2" button head bolts inserted from the outside with one 316-501 flat washer. After passing the bolt through the bracket and brace install bolt cover, followed by flat washer and lock nut on the inside. DO NOT INSTALL ANY BOLT CAPS AT THIS TIME.

STEP #3: Now assemble the six units joints using the same techniques outlined in the first two steps.

Step#4: Continue this procedure for the final five brace connections at the top.


STEP #5: After assembly, locate the five footing holes as shown on the illustration. Place a wood or metal stake at each hole location. Move Geo-Dome out of the way and dig holes. (See Installtion Key) Allow for proper depth of resilient surfacing.

STEP #6: Reposition Geo-Dome and attach 503-647 Anchor as shown. Loosen one of the lower bolts on the bottom bracket and attach anchor. Tighten all connections on the Geo-Dome and cover the lock nuts by tapping in the protective caps. Pour concrete into holes.

STEP #7: Attach warning label and manufacurer's indentification label to a clean surface. The labels should be attached in a location where they are clearly visible and legible and away from normal hand and foot placement areas. The labels must be replaced if they become illegible, destroyed, or removed. Contact your distributor for replacement labels.

Sheet 2 of 3

CONCRETE FOOTING
9" DIA. X 18" DEEP
TYP 5 PLS

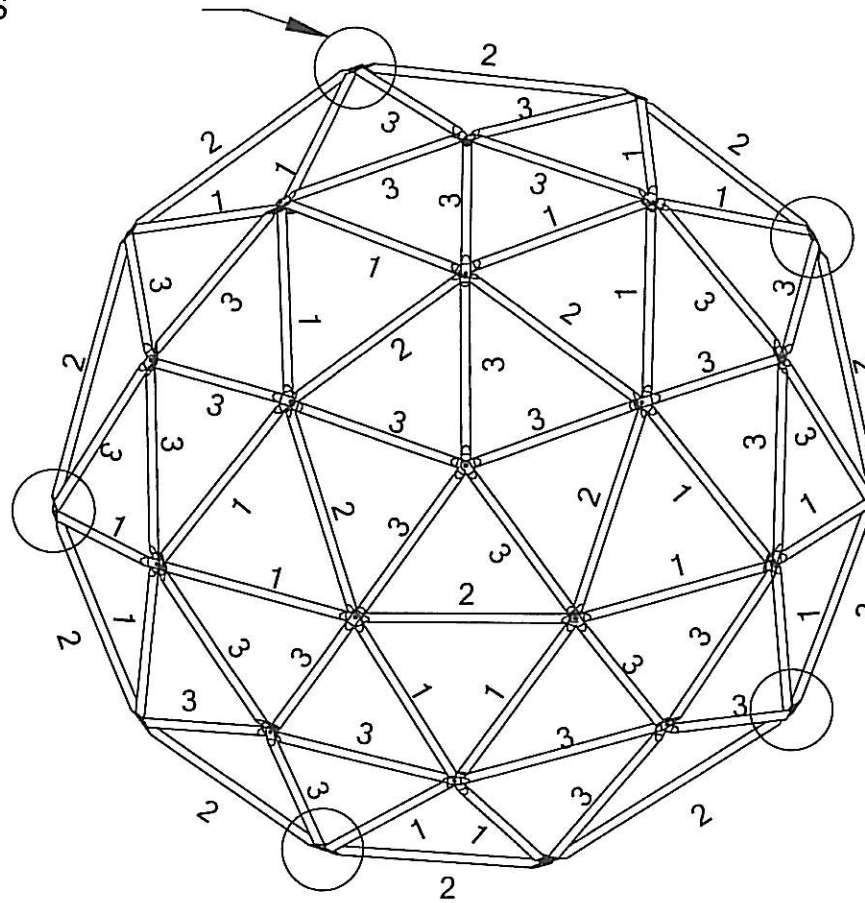

COLOR TABLE

1	ALMOND
2	GREY
3	LT. BLUE