


SINGLE SIDE BIKE RACK

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	803-266	Spacer Bar, 5'-2 3/4"	1
2	803-267	End Support	2
3	803-327	Ladder	1
4	105-015	1 5/8" Pipe Plug	8
5	415-515	1 5/8" T-Clamp	4 Pr
6	196-644	3/8" x 8" Anchor Bolt	4
7	116-514	5/16" x 3 1/2" Hex Bolt	2
8	116-510	5/16" x 2 1/2" Hex Bolt	8
9	326-501	5/16" Lock Washer	8
10	216-601	3/8" Hex Nut	4
11	226-601	3/8" Lock Nut	4
12	226-501	5/16" Lock Nut	12
13	316-601	3/8" Washer	4

IMPORTANT

Please retain this instructions sheet in your files. It contains important maintenance instructions, as well as replacement parts information.

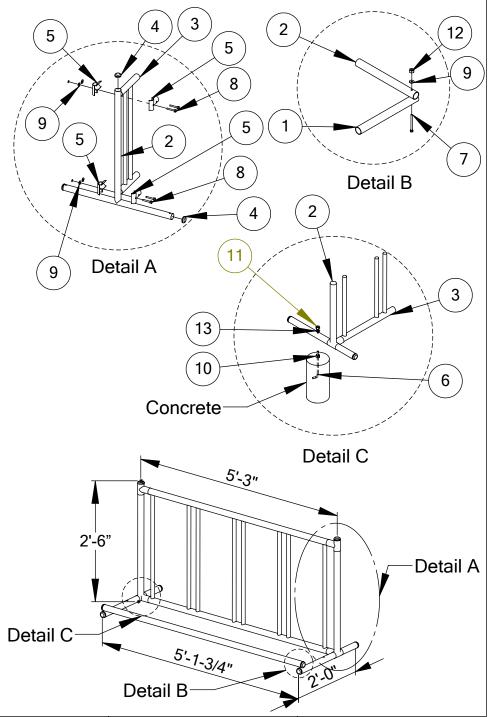

Sheet 1 of 2 Rev 06/20/19

5 4 3 2



GENERAL ASSEMBLY INSTRUCTIONS:

Check all the parts and hardware with the packing list to be sure you have received everything needed to assemble this product. CONTACT YOUR LOCAL DISTRIBUTOR OR SPORTSPLAY EQUIPMENT WITH NOTIFICATION OF ANY MISSING OR DAMAGED PARTS. Contact must be made within ten days of receipt of your order.

Only hand tighten nuts & bolts on initial assembly. Final tightening should be done EVENLY after final assembly when unit has been plumbed & leveled.

After assembly is complete, ANY ENDS OF BOLTS PROTRUDING BEYOND NUTS SHOULD BE CUT OFF AND/OR PEENED OVER TO REMOVE ANY SHARP PROJECTIONS. Go over entire unit and file smooth any sharp edges or projecitons that may have been caused by rough handling in shipping or installation. T-Clamps are designed for both one and two bolt connections. In many situations only one bolt is required. See specific assembly instructions. On products with platforms install 1 - 2 degrees off level to facilitate water drainage

GENERAL MAINTENANCE INSTRUCTIONS:

Check MONTHLY for loose bolts, damaged, or broken parts. Tighten and/or replace immediatly.

SPECIFIC ASSEMBLY INSTRUCTIONS:

- 1. Completely assemble bike rack.
- Position bike rack in proper position, mark footing holes, move bike rack to one side and dig holes.
- 3. Assemble anchor bolts to end supports and place bike rack in position over footing holes.
- 4. Pour concrete and wait 48 hours befor using equipment.

Rev 06/20/19 Shieet 2206 22

4 3