


PERMISSION OF FREENOTES HARMONY

ITEM NO.	PART DESCRIPTION	In Ground - Recycled Post/QTY.	In Ground - Steel Post/QTY.	Surface Mount - Steel Post/QTY.
1	Swirl Instrument Assembly	1	1	1
2	Large SS Holster	2	2	2
3	In Ground Recycled Post, 96"lg.	2	-	-
4	In Ground Steel Post, 96"lg.	-	2	-
6	Surface Mount Steel Post, 60"lg.	-	-	2
6	#8 Flat Head Screw, .5"lg. SS, T15 tamp	12	12	12
8	#8 Button Head Screw, 1.25"lg. SS, T15 tamp	12	-	-
9	#10-24 Button Head Machine Screw, 1"lg. SS, T25 tamp	-	12	12
9	3/8"-16 Wedge Expansion Anchor, 3.75"lg. SS	-	-	8
10	35/64" Hex Nut Cap	-	-	8
11	Security Driver	1	1	1

**Step 1:** Start by mounting the Holsters to the Instrument Back with the provided #8 Flat Head Screws and Driver. The Back comes predrilled. Screw heads should be flush with the Holster surface when properly installed. Holster should also be flush along the back. Drive Screws slowly to prevent stripping.

Step 2: With two people, situate the Instrument with Holsters installed onto the Posts. Posts come predrilled and/or tapped. Fasten the Instrument to the Posts with the provided #8 Button Head Screw for Recycled Posts or #10-24 Button Head Machine Screw for Steel Posts. Drivers are provided.

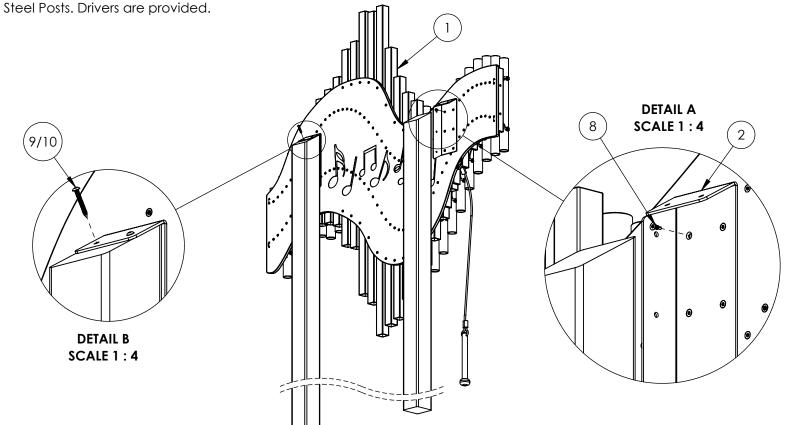



FREENOTES HARMONY PARK 544 CHESTNUT ST, CHATTANOOGA, TN 37402 TEL: 833.262.1569

WWW.FREENOTESHARMONYPARK.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FREENOTES HARMONY PARK. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF FREENOTES HARMONY
PARK IS PROHIBITED.

## Parts List and Instrument to Post Installation

**SWRL-INSTALL** 

DWG. NO.

REVISION: B

SCALE: 1:16

DATE: 3/23/2018

SHEET 2 OF 4


**Step 1:** Excavate two 10" diameter holes, 36" deep, and 32" on center at the installation location. Contractor can modify Post to desired height. Post Length = Frost Depth (36" Recommended) + Finished Post Height

Finished Post Height Guideline: (Ages 3-5, 39") (Ages 5-7, 43") (Ages 7-11, 51") (Adult, 60")

**Step 2:** With two people, lower the Posts with the Instrument attached into the excavated holes.

**Step 3:** Verify the correct placement, levelness, and finished height of the Instrument. Check for sufficient clearance around the Instrument, a 36" perimeter around the Instrument is recommended for wheelchair accessibility.

**Step 4:** Last pour concrete around the posts. It is recommended to brace the Instrument to hold it rigid while the concrete cures. Leave to set according to the concrete manufacturers guidelines. Approximately (6) 80lb. bags will be needed.

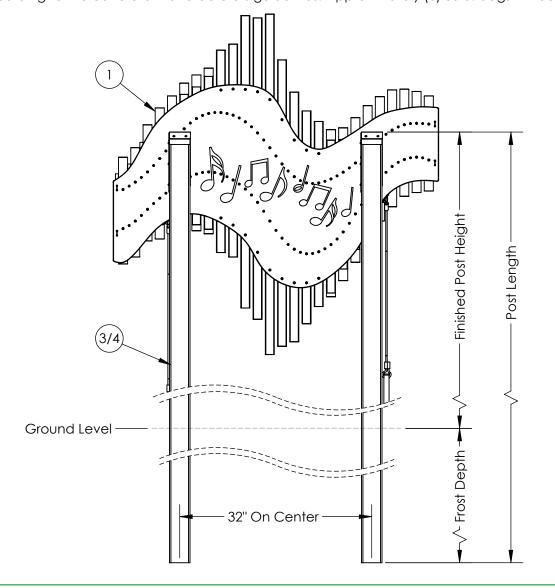



EREENOTES HARMONY PARK 544 CHESTNUT ST, CHATTANOOGA, TN 37402 TEL: 833.262.1569

WWW.FREENOTESHARMONYPARK.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FREENOTES HARMONY PARK. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF FREENOTES HARMONY
PARK IS PROHIBITED.

In Ground Installation

SWRL-INSTALL

DWG. NO.

REVISION: B


SCALE: 1:16

DATE: 3/23/2018

SHEET 3 OF 4

**Step 3:** With two people place the Instrument Assembly with Posts attached onto the concrete pad and mark the center of the holes on the surface mount bases. After you have made your marks, set aside the Instrument in order to drill for anchor holes. With a hammer or rotary drill, drill through concrete at marked locations. Drill to a minimum depth of 4". A 3/8" masonry drill bit will be needed.

**Step 4:** Place the Instrument back over the drilled out holes. Insert provided anchor bolts into aligned holes. Position anchor nut so that it is flush with the top of the bolt. Pound anchor bolts into the hole until the anchor washer is flush with the surface mount bases. Tighten anchor bolts until they are snug. Cover remaining bolt sections with provided nut caps.

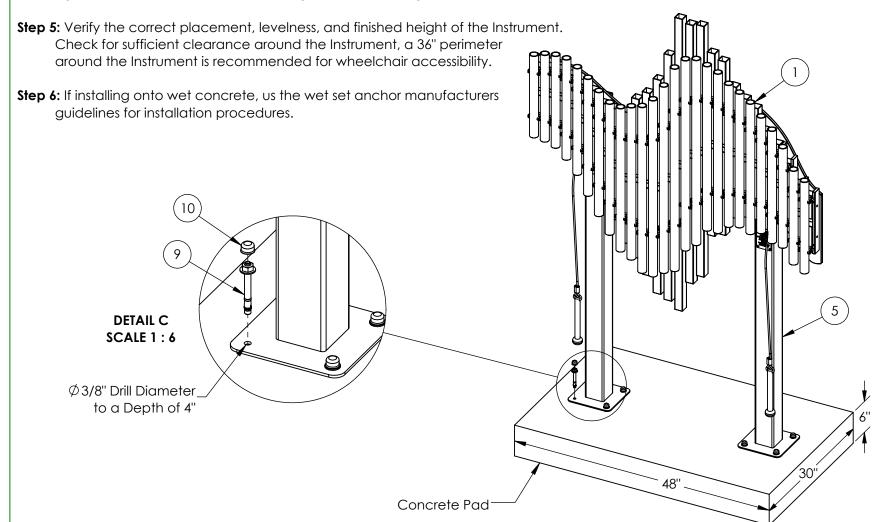



EREENOTES HARMONY PARK 544 CHESTNUT ST, CHATTANOOGA, TN 37402 TEL: 833.262.1569

WWW.FREENOTESHARMONYPARK.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
FREENOTES HARMONY PARK. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF FREENOTES HARMONY
PARK IS PROHIBITED.

Surface Mount Installation

SWRL-INSTALL

DWG. NO.

REVISION: B

TTLE

SCALE: 1:16

DATE: 3/23/2018

SHEET 4 OF 4