



Nirbo pool climbing walls are made of high quality stainless steel and engineering plastics, they are very durable and have excellent fun factor.


Manufacturing design and construction is in full complienace with ASTM Standard F2461.

Straight Three Panels | P30010-01

Max Water Depth		Freeboard (deck to water level)		
114" (2.9 m)		8" (0.2 m)		
Width	Depth	Height		
42" (1067 mm)	51" (1302 mm) 157" (3998 mm)		


Nirbo Aquatic Inc.

2400 Lucknow Drive, unit 39, Mississauga, ON L5S 1T9, Canada Toll Free: 1.888.68.NIRBO (64726) | Tel: 1.905.766.4474 | Fax: 1.905.766.4467 Website: www.nirbo.com | Email: info@nirbo.com

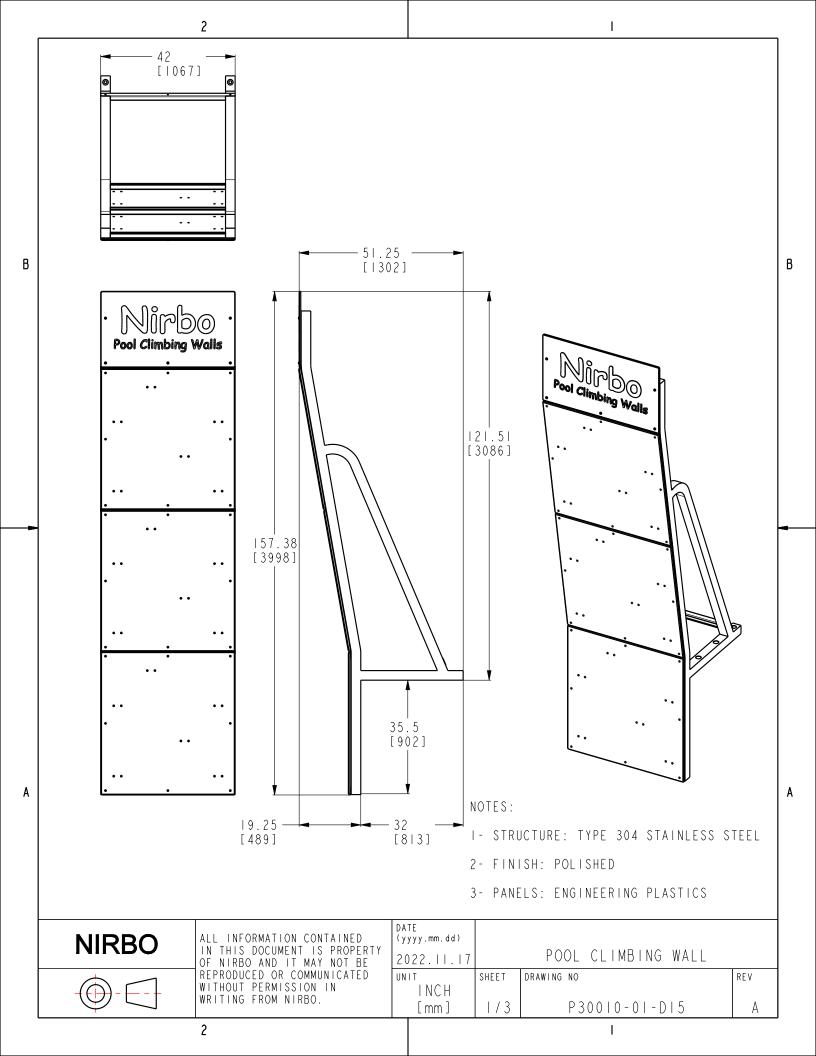

Nirbo Aquatic Inc. Tel: I-905-766-4474, Web: www.nirbo.com

MIN 6 [152] THICK, MIN 3000 PSI,

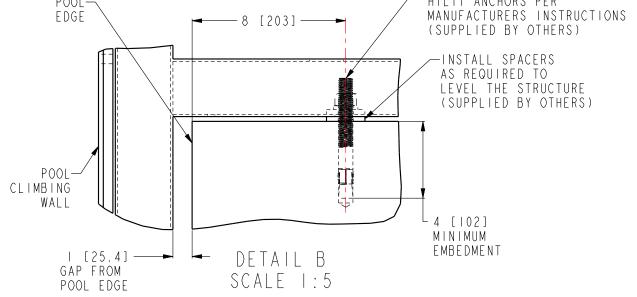

NOTES:

Α

В

- I- FOLLOW LOCAL CODES AS REQUIRED.
- 2- BOND COMPONENT AS REQUIRED PER LOCAL CODES.
- 3- HARDWARE SUPPLIED BY MANUFACTURER SHALL BE USED FOR PRODUCT ASSEMBLY.

INIRDU IN THIS DO	MATION CONTAINED OCUMENT IS PROPERTY AND IT MAY NOT BE DATE ('yyyy) 2022	.mm.dd) ?. . 7	POOL CLIMBING WALL INSTALLATION	
	ROM NIRBO I I	NCH sheet 1/2	DRAWING NO P 4 0 0 0 1 - 0 1	REV O I

2

ı

