



---

# Three Hoop Dog Rings


PDP007

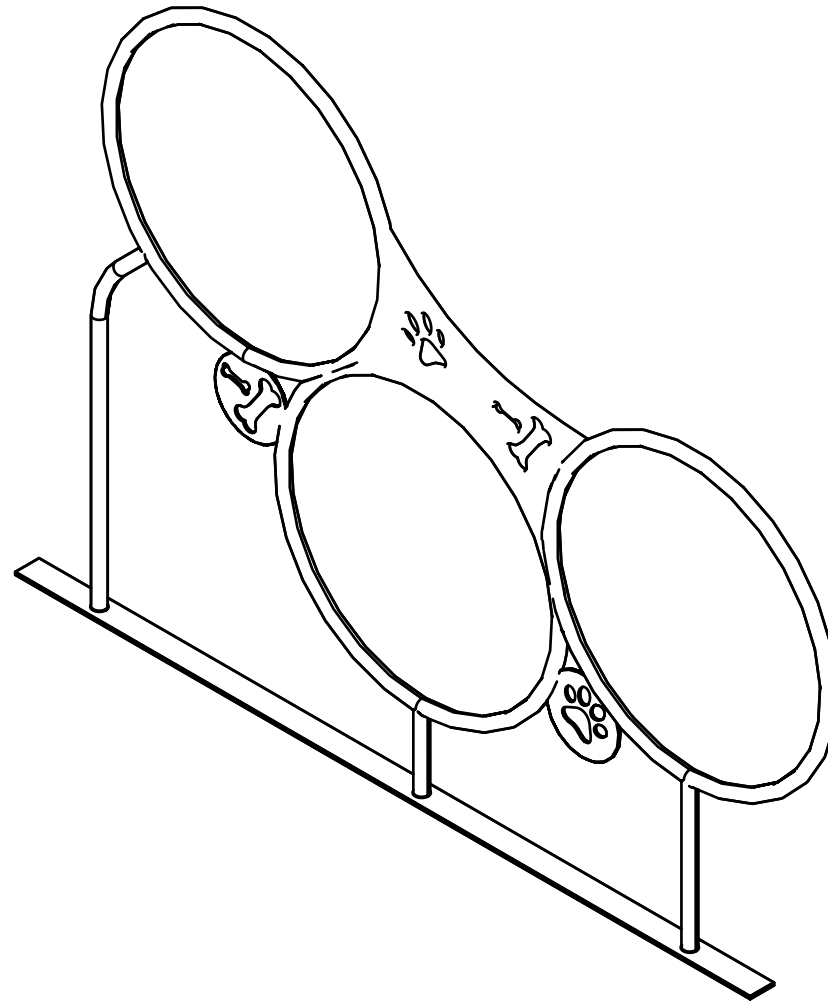


M8\*20mm




M8\*30mm




M8\*45mm

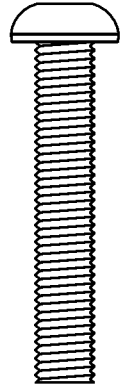


M8\*50mm




M8\*80mm




M10\*25mm




M10\*35mm




M10\*65mm

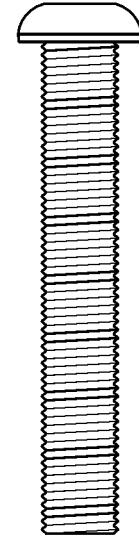


M8 Washer




M10 Washer




M10 Spring Washer




M8 Lock Nut



M10 Lock Nut



Barrel Nut




#### Material Specifications:

Posts - Steel

Plastics - Low Density Polyethylene

Hardware - Stainless Steel

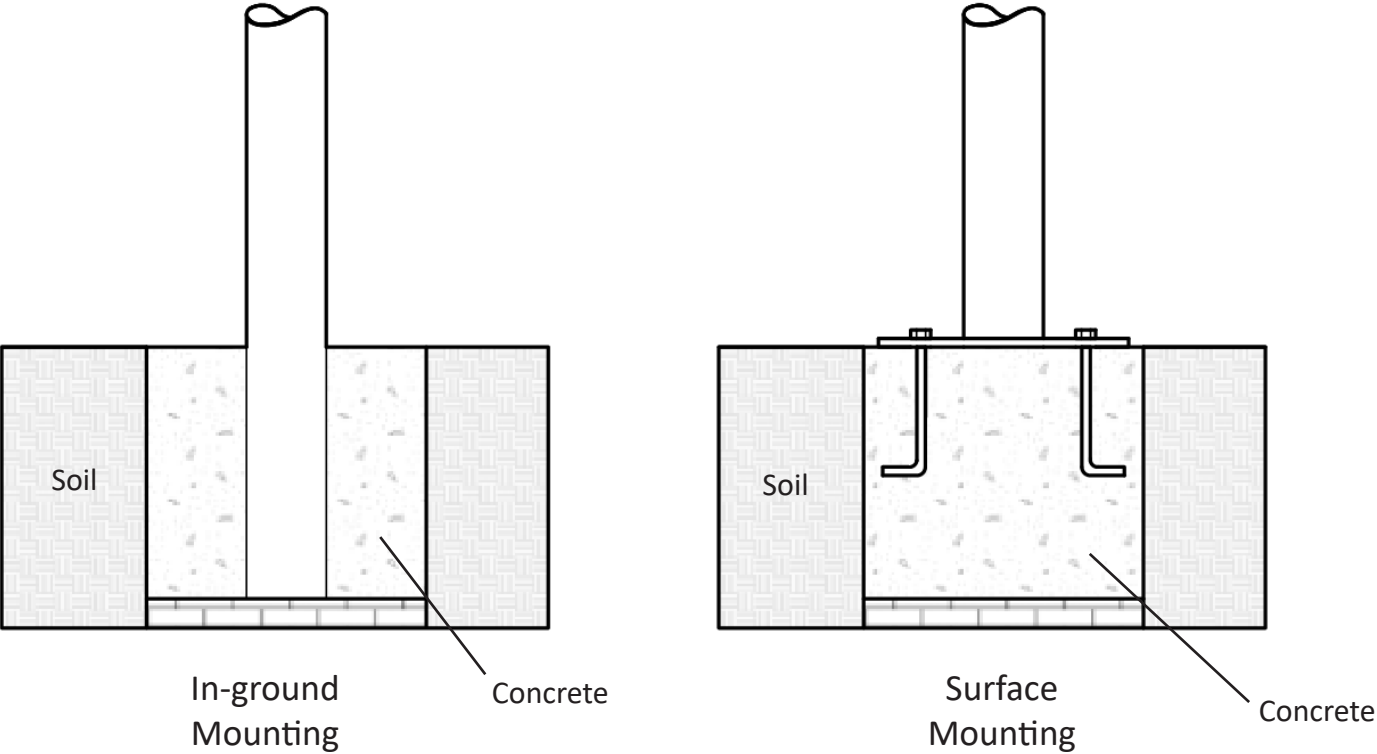

## Surface Mounting Option


- a** The recommended Surface Mounting option for the Dog Park equipment is to use the provided J-Bolts.

Start by digging a hole appropriate to the specific equipment being installed.

For most of the Dog Park Equipment, a 12" diameter x 18" deep footing is used. (Some Equipment may specify a different size footing.)


Fill the footing holes with concrete and insert the J-Bolts into the wet concrete. Loosely fit the equipment to the J-Bolts, and brace the equipment using straps or blocks so that it does not shift while the concrete dries.

**a**

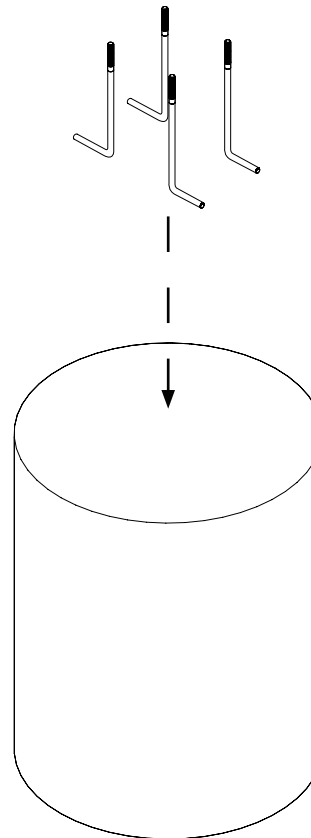

- b** After the concrete has dried, tighten down the equipment onto the J-Bolts using one (1) M10 Spring Washer, one (1) M10 Washer, and one (1) M10 Nut for each J-Bolt.

**b**

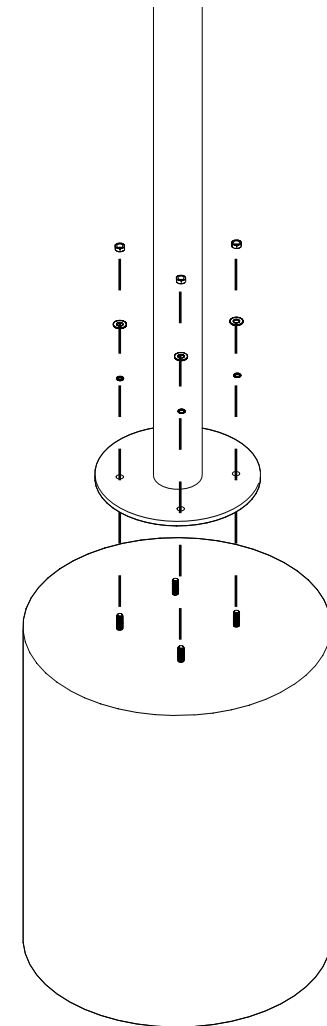

Note: Equipment should be fully assembled before being mounted, unless specifically stated in an install step.