



WISDOM PLAYGROUND

CUSTOMER'S GUIDE

Customer Name:

Sales Number:


Unit Number: 75-21012

Distributor Name:

Distributor Phone Number:


(DETAIL 1)

Support Post Footing Detail

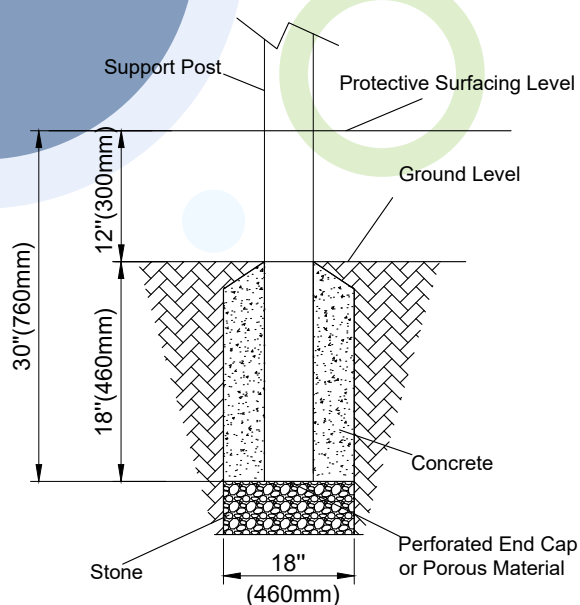


(DETAIL 2)

Single Post Footing Detail

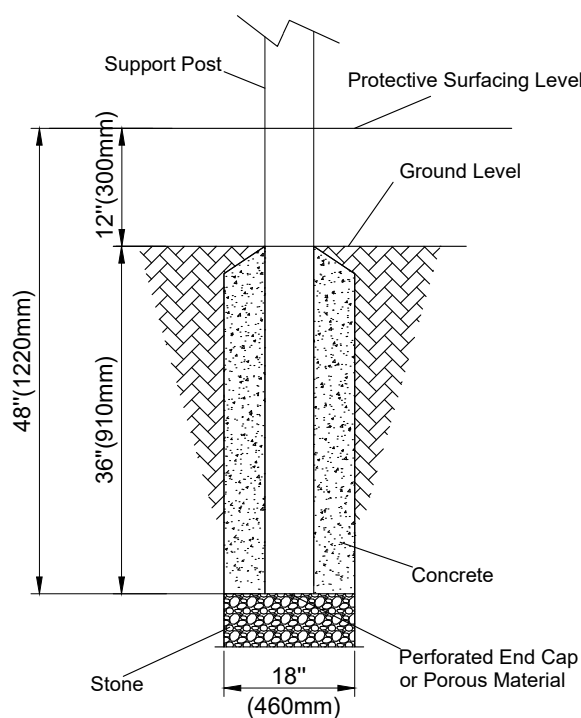


(DETAIL 3)

Component Footing Detail

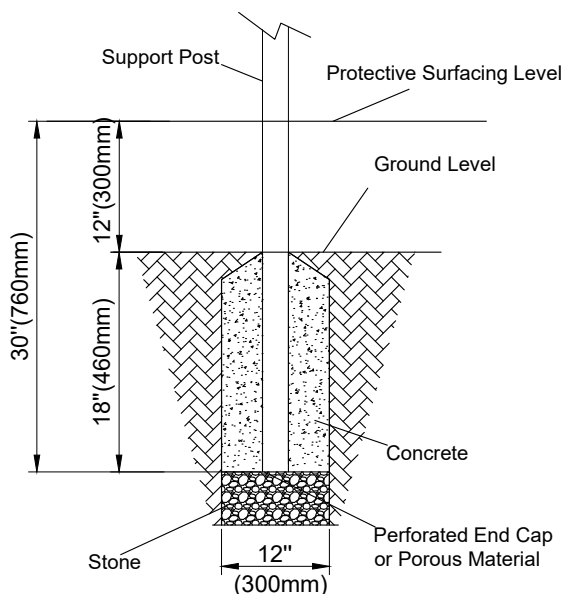

(DETAIL 4)

Surface Mount Detail

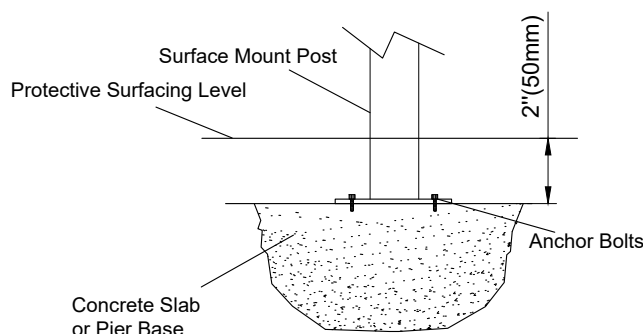**INSTALLATION NOTES:**

- (1) Paved surfaces such as asphalt and concrete, are not acceptable for use under your structure.
- (2) It is the consumer's responsibility to check with local utilities prior to excavating footings for any underground utility lines that may exist within the installation area.
- (3) It is the consumer's responsibility to check local soil conditions and drainage within the site area. Inquire with local contractors for appropriate recommendations.
- (4) If the structure is to be installed across uneven terrain, maintain the support post mark for protective surfacing level at the lowest grade. Adjust other footings accordingly.
- (5) The base of footings must be below frost lines.
- (6) Do not encase the bottom of support posts in concrete. Place all posts directly on packed stone.
- (7) Assemble the entire structure before pouring concrete unless specifically instructed to do so in the individual component installation instructions.
- (8) Read completely the installation instructions provided with your structure prior to beginning construction.


SITE NOTES:

- (1) The site plan provided must be checked against the actual site area to ensure that placement of your structure meets required clearances.
- (2) The dimensions labeled are for location of footing holes not exact placement of equipment. Assemble plumb and level equipment before pouring concrete.
- (3) There must be a minimum distance of 6'(1830mm) between any obstacle, sidewalk, etc., and your structure.
- (4) Slides must have a use zone that extends out from the lower exit section of the slide a distance that is at least 6'(1830mm) or equal to the vertical distance from the highest point of the sliding surface to the top of the protective surfacing, whichever is greater. The slide use zone should not extend greater than 8'(2438mm) from the end of the lower exit section.
- (5) The complete area, including the space under and around the equipment, must be covered with an impact attenuating material. See the 1997 publication, "Handbook for Public Playground Safety" published by the U.S. Consumer Product Safety Commission, for guidelines and recommendations on the type and depth of surfacing material. For a copy of the "Handbook for Public Playground Safety" write to: U.S. Consumer Product Safety Commission, Office of Information and Public Affairs, Washington DC 20207.
- (6) Supervise children as they play.


**Thank-You
for the
Opportunity
to
Serve You!**



3879 US Highway 421, Unit 110 & 120, Wilmington, NC 28401
www.wisdomplayground.com
910-769-3576

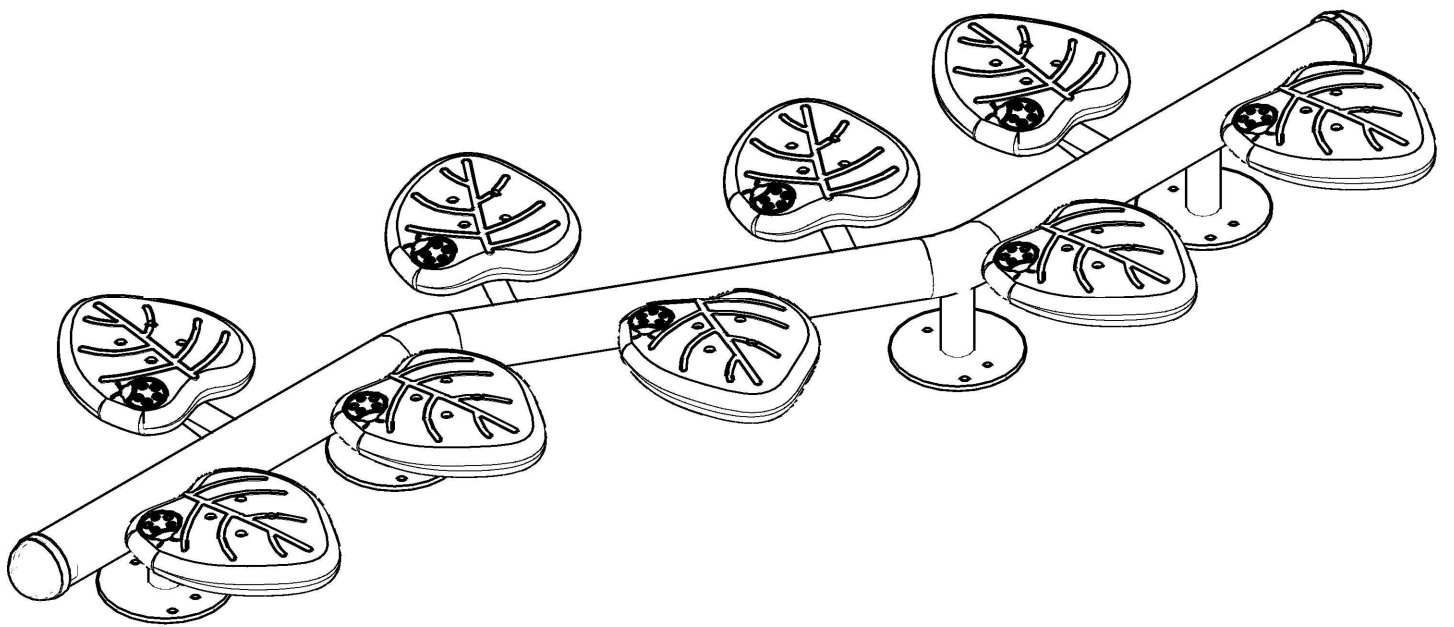

Site Layout

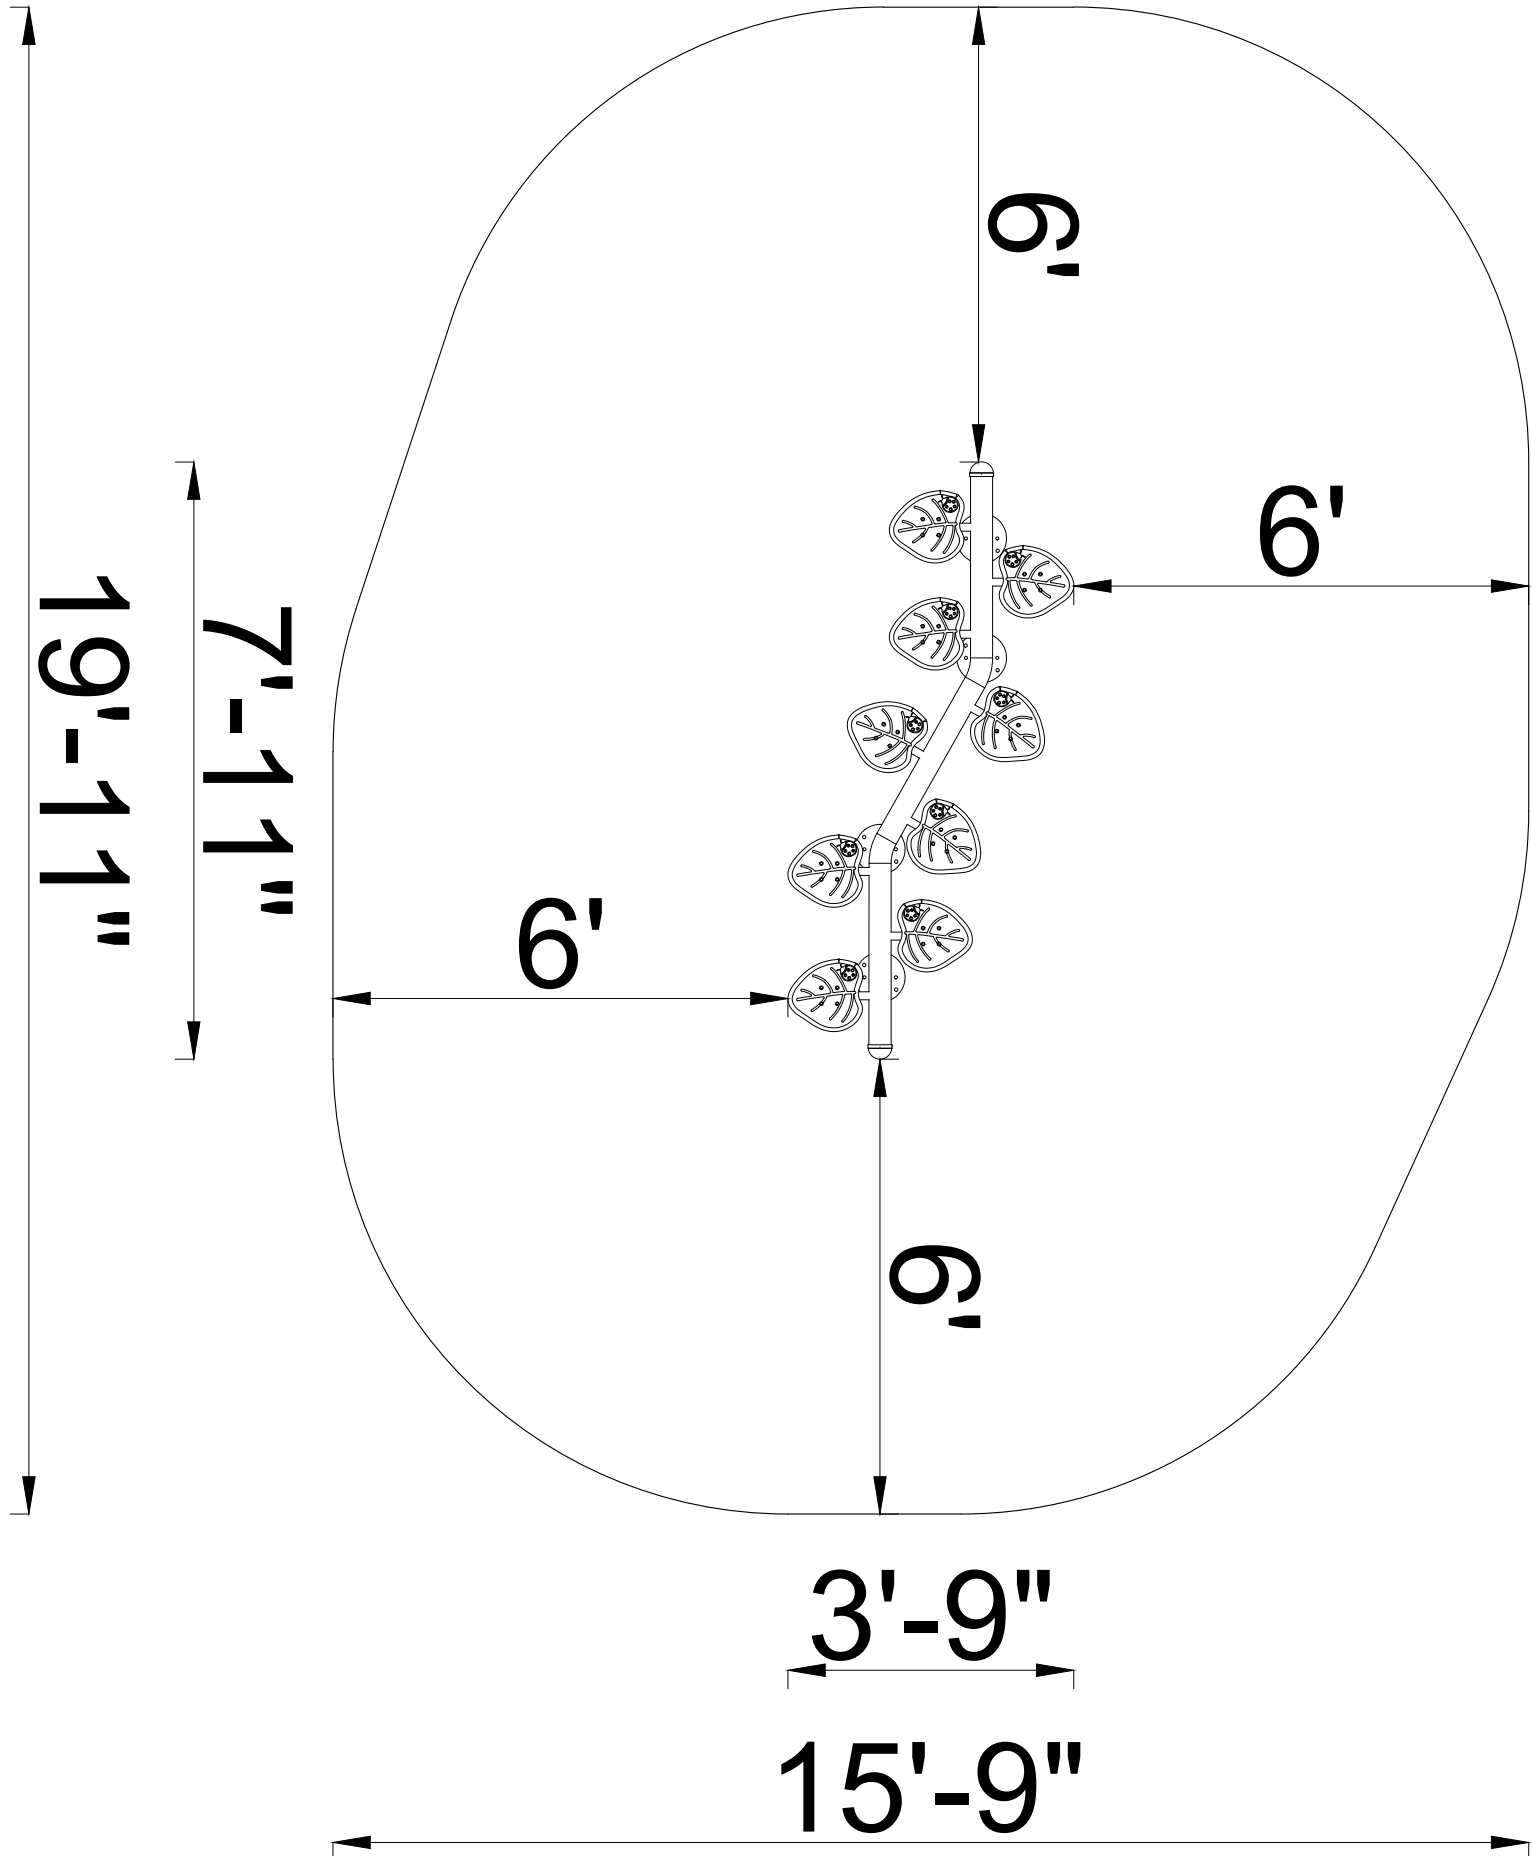


Installation steps:

1:Align the corresponding holes on the Overhead Challenger.

3: Insert expansion bolts and tighten.

75-21012 96" Leaf Balance Steps			
Number	Name	Model	Quantity
1	M8*100 Expansion Bolt	M8*100	16

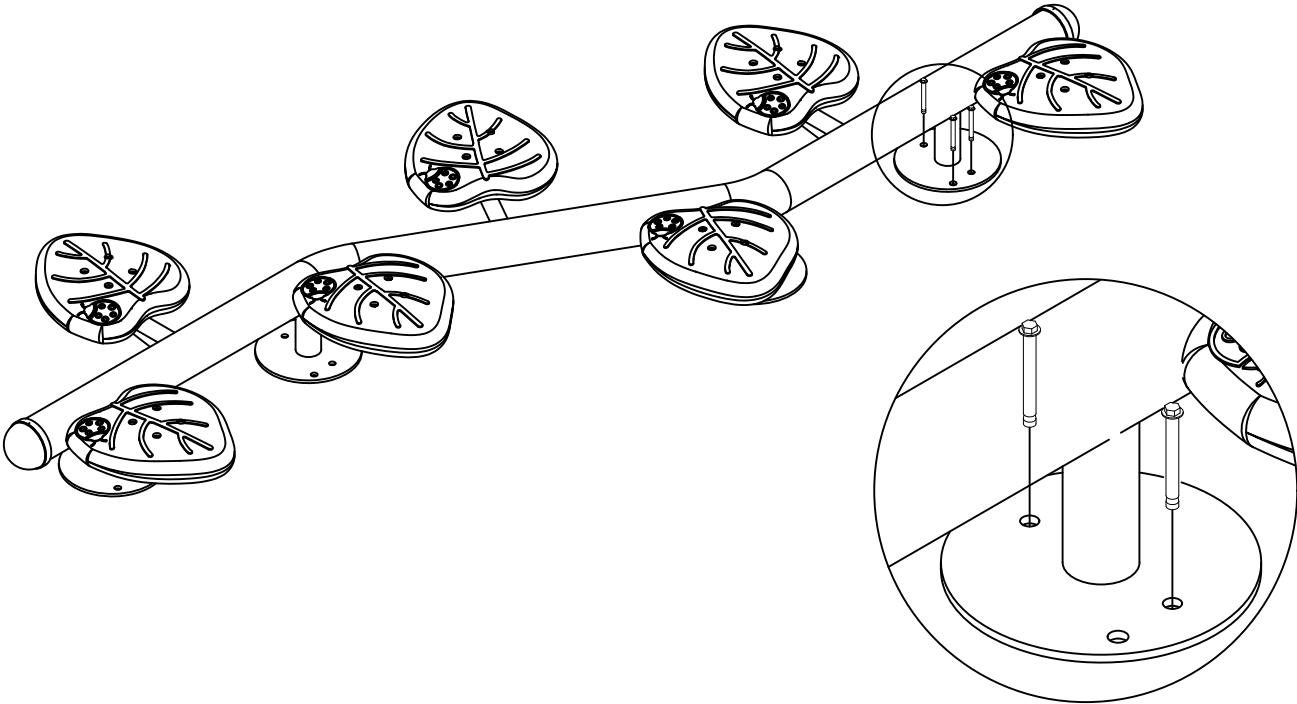

Installation steps:

1: Install Balance Steps to the corresponding Inground Footers as shown on the overhead drawing.

2: Confirm the location of Inground Footers and fix them as relevant installation steps.

75-21012 96" Leaf Balance Steps

Number	Name	Model	Quantity
1	TAMPER RESISTANT TORX-BOLT	M8*25	8
2	FLAT WASHER	9/20*T1.2mm	16
3	LOCK NUT	M10	8

